


ITEM	REQD	PART NO.	DESCRIPTION	REMARKS
1	1	B-2996-A	BODY	3" WITH CLAMP ENDS
2	1	C-2983-A	FLAVOR TUBE	CUSTOMER TO SPECIFY STYLE
3	1	B-2994-D	LOWER BUSHING	
4	3	A-3000-4	SEAL	
5	2	K13HH-2"	CLAMP	TCI-SUPERIOR
6	2	A-3000-6	"O" RING	-226
7	1	B-2990-A	FLAVOR TEE	2 x 2 WITH CLAMP END
8	1	B-2989-D	UPPER BUSHING	
9	1	A-3000-9	DRIVE PIN	
10	2	A-3000-10	"O" RING	-10
11	1	A-3000-11	COUPLING	
12	1	A-3000-12	SET SCREW	1/4-20 x 1/4" LG. S.S.
13	1	B-2988-A	BONNET	
14	4	A-3000-14	SCREW & LOCKWASHER	10-32 x 7/8" LG. SHCS S.S.
15	1	586	MOTOR (1/8 HP)	BODINE
16	1	SL52	SPEED CONTROL	MINARIK

△B\*  
△A\*

\* THIS COMBINATION PROVIDES 0-180 RPM VARIABLE SPEED OUTPUT

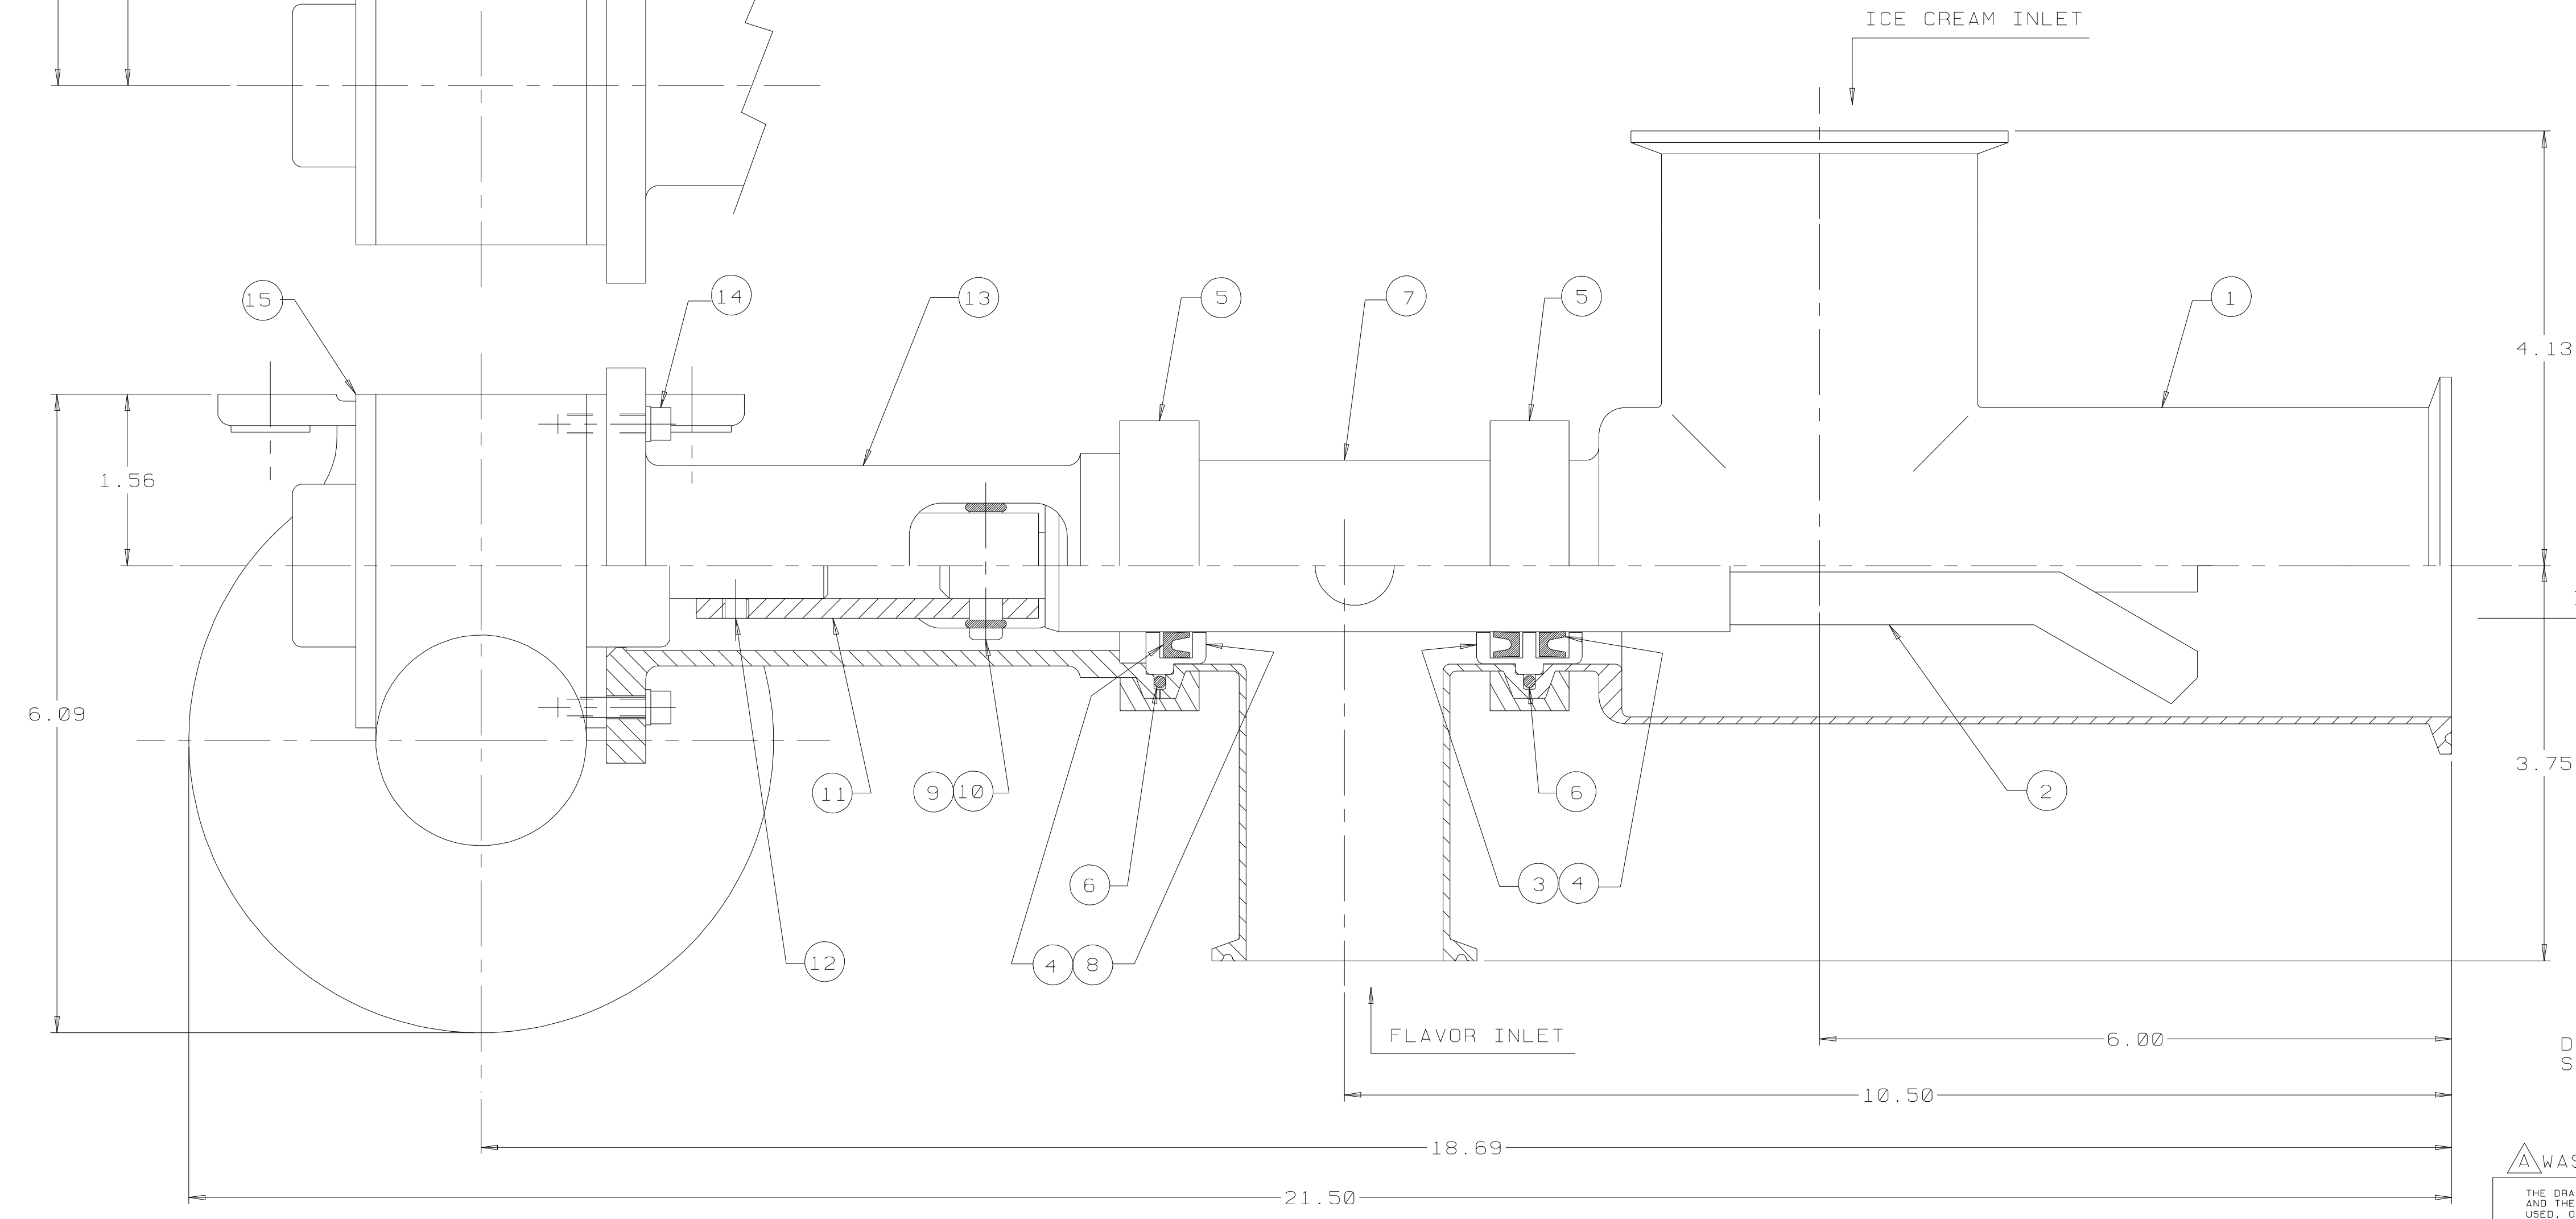

**NOTE**  
DIMENSIONS ARE APPROXIMATE AND SUBJECT TO CHANGE WITHOUT NOTICE

△A WAS SL52    △B WAS 586

THE DRAWING AND INFORMATION CONTAINED ON THIS DOCUMENT IS CONFIDENTIAL AND THE SOLE PROPERTY OF HOLLAND MFG., INC. AND MAY NOT BE REPRODUCED, USED, OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION OF AN AUTHORIZED AGENT OF HOLLAND MFG., INC.

**HOLLAND MANUFACTURING, INC.**  
6851-51 ST.    KENOSHA, WIS

SCALE: FULL    BY: SW  
DATE: 1-19-88

VERSACAD DWG    3" SINGLE FLAVOR ELECTRIC DRIVE  
VOLUME:    VARIABLE SPEED VARIEGATOR  
FILE #: D3835A    MODEL ETK-3"    D-3835-A  
SANITARY CLAMP PORTS

- NOTES:**
- VARIEGATOR TO BE DISASSEMBLED AND HAND CLEANED DO NOT CLEAN IN PLACE
  - MOTOR AND SPEED CONTROL TO BE PROTECTED DURING WASHDOWN
  - ALL PRODUCT CONTACT MATERIALS TO BE STAINLESS STEEL TYPE 304, BUNA OR DELRIN
  - ELECTRICAL REQUIREMENTS: 120VAC, 50/60HZ

TOLERANCES UNLESS OTHERWISE SPECIFIED  
 0.00    ±.01  
 0.00    ±.015  
 0.000    ±.005  
 0.0000    ±.0005  
 ANGULAR    ±1 DEG